

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
16 June 2005 (16.06.2005)

PCT

(10) International Publication Number
WO 2005/054377 A2

(51) International Patent Classification⁷: **C09C 1/36**

(21) International Application Number:
PCT/US2004/038016

(22) International Filing Date:
15 November 2004 (15.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/524,956 25 November 2003 (25.11.2003) US

(71) Applicant (for all designated States except US): **THOMSON LICENSING S. A.** [FR/FR]; 46 Quai A. Le Gallo, F-92100 Boulogne-Billancourt (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BARTCH, Donald, Walter** [US/US]; 601 Marlow Drive, York, Pennsylvania 17402 (US). **HALECKY, Alan, Andrew** [US/US];

40 Elm Lane, Glenmoore, Pennsylvania 19343 (US). **FARRAH, John, Stephen** [US/US]; 1411 West View Drive, Lancaster, Pennsylvania 17603 (US). **EDWARDS, James, Francis** [US/US]; 1829 Rockford Lane, Lancaster, Pennsylvania 17601 (US).


(74) Agents: **TRIPOLI, Joseph, S.** et al.; 2 Independence Way, Suite #200, Princeton, New Jersey 08540 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: METHOD OF MANUFACTURING A CRT USING A FLOWCOATING PROCESS

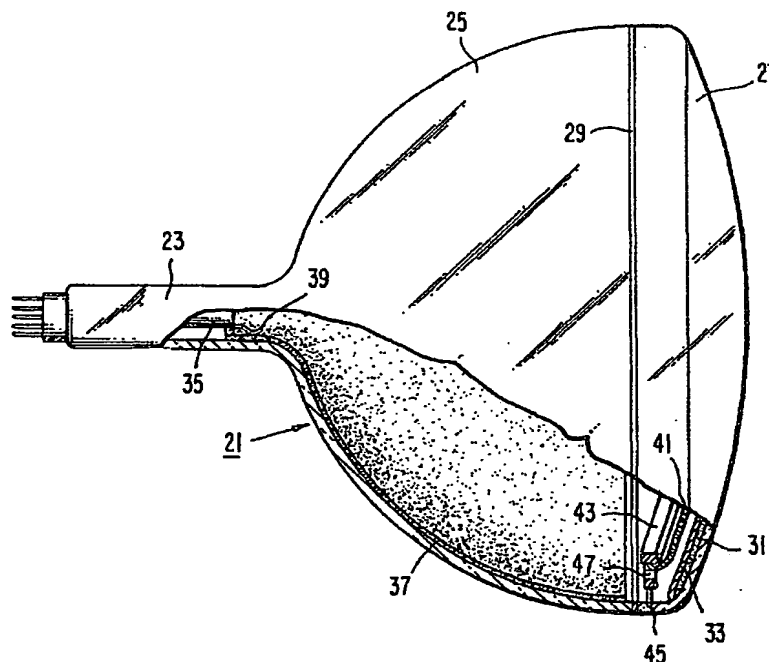

(57) Abstract: The invention incorporates a method of manufacturing a CRT that comprises the application of an internal conductive coating formulation by a flowcoating process on a portion of an interior surface of a funnel and on an interior portion of a neck of the CRT. The formulation comprises iron oxide, graphite, a silicate, a copolymer, surfactant and water. In a preferred embodiment, the copolymer is a maleic copolymer.

WO 2005/054377 A2



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*